




## Rotary Monoblock Volumetric Liquid Filling with Capping Machine

### **LIQFILL-240<sup>MB</sup> Automatic Rotary Monoblock Volumetric Liquid Bottle Filling & Capping Machine**

The Automatic Rotary Monoblock 24x12 Head Volumetric Linear Bottle Filling and Capping Machine, Model LIQFILL-240<sup>MB</sup> is suitable for Round, Oval, Flat or Square Bottles with maximum speed of 240 Bottles per minute. Machine with Rotary operation of bottles resulting in smoother movement of bottles at lower speed producing higher output. The output of Bottle Filling Machines depending on nature of Liquids, Bottle Diameter, Bottle Height, Bottle Neck Size and Fill Volume. Machine construction in fully Stainless Steel finish including M.S. Frame structure with Ss304 cladding. Machine with Optional Turn Tables at In-feed and Out-feed with individual drives to match the speed of incoming and outgoing Bottles for smoother operation. All parts coming in contact with Liquids are made from SS 316 Materials.

Machine works on Volumetric Piston Filling principal which fills Liquid into the bottle with High Level of Fill Accuracy of liquid in each bottles. Machine suitable for Filling Phamaceutical products, Oil, Mouth Wash etc.

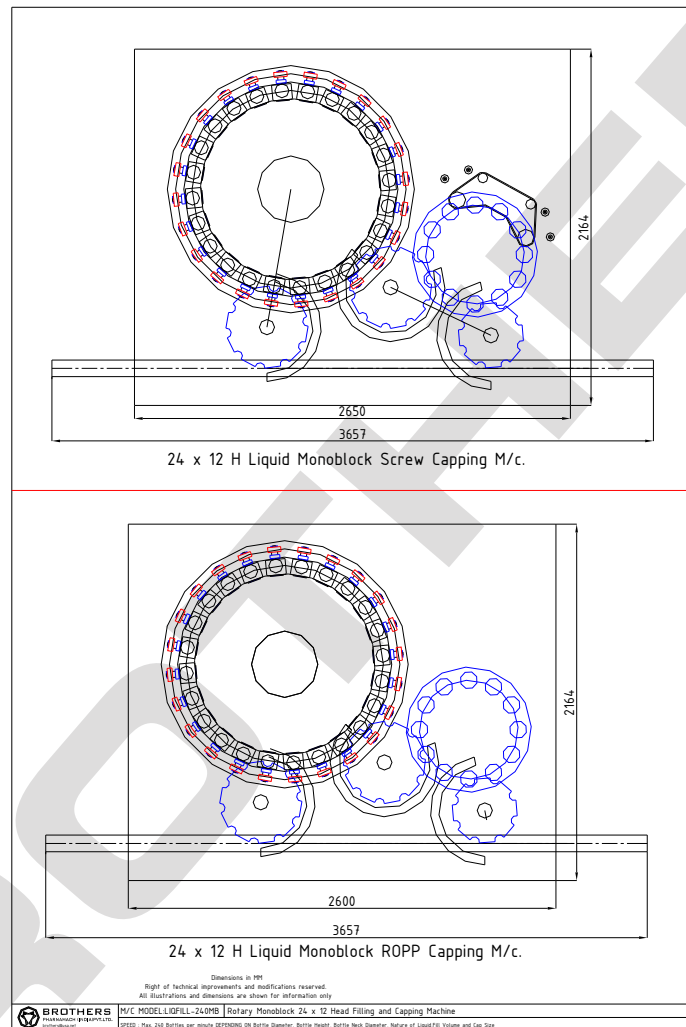

### **SPECIAL FEATURES :**

- No Bottle - No Fill System, No Bottle - Machine Stop System
- Rotary Bottle Movement system for smoother operation
- All contact parts made of Ss316 material with easy removal system for Auto-Claving/Sterilization/Cleaning
- Machine construction in SS 304 material
- Very High Fill Accuracy
- Automatic Infeed and Exit of Bottles
- Minimum Change Over time
- Filling and Capping operation in Single machine due to Monoblock design
- Built-in A.C. Variable Freq. Drive System

## TECHNICAL SPECIFICATIONS

Bottle Diameter : 28mm to 70mm\*

Bottle Height : 50mm to 200mm\*

Cap Size : 18mm to 55mm ROPP or Plastic Screw Cap

Fill Range : 15ml to 120ml or 30ml to 250ml\*

Accuracy : +/- 1% Depending on Liquid with Single Dose

Electrical : 440VAC 3 Phase / 220 VAC Single Phase Power Supply (50 Hz)

Power : 2.5 H.P.

Speed : Max. 240 Bottles per minute depending on Fill Volume and type of Liquid

Syringe Fill Range: 15ml to 120ml, 30ml to 250ml or 250ml to 500ml on Special Ver.

Conveyor Height : 800-850 mm

Overall Dimensions : 2600 mm (L) x 2200 mm (W) x 1550 mm(H)

\* Specification can be changed as per customers requirements

**BROTHERS PHARMAMACH (INDIA) PVT. LTD.**

Plot No.2, Phase II, GIDC, Vatva, Ahmedabad 382445. INDIA  
Phone : +91 79 40213213, 25831346 Fax: +91 79 40213220  
+91 9825037971, 9825006052

Email : [info@brothers.in](mailto:info@brothers.in) [mevada@usa.net](mailto:mevada@usa.net) Website : [www.brothers.in](http://www.brothers.in)